



EnGenius EWS Switch'te kullanıcı girişi nasıl değiştirilir ve eklenir?


1. GUI'ye giriş yapın:



2. Management'e gidin ve Kullanıcı Yönetimi'ni seçin

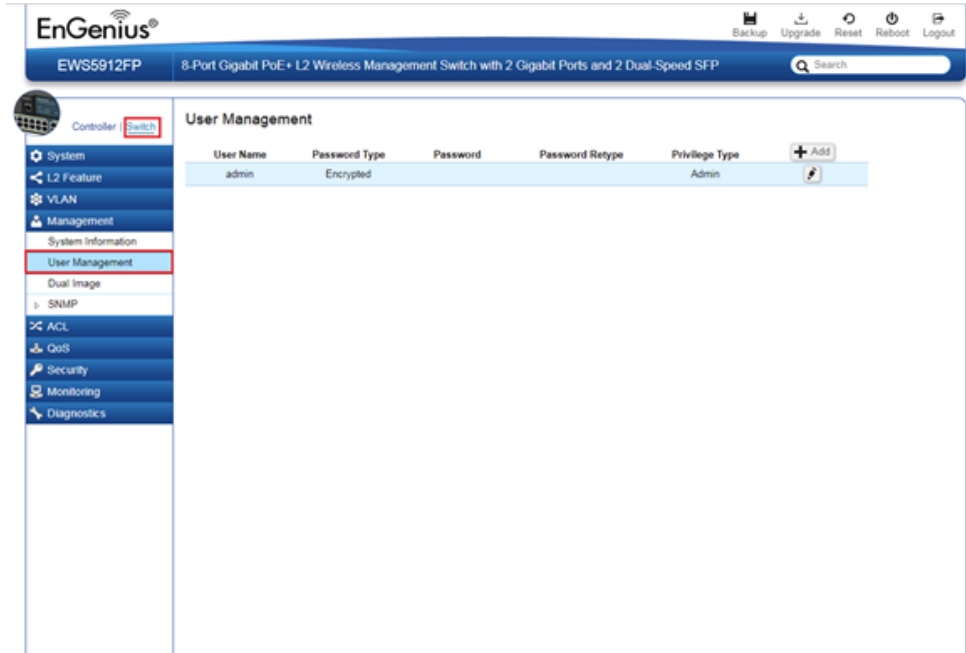


3.  Oturum açma parolasını ve ayrıcalığını değiştirmek istiyorsanız Düzenle düğmesini tıklayın .

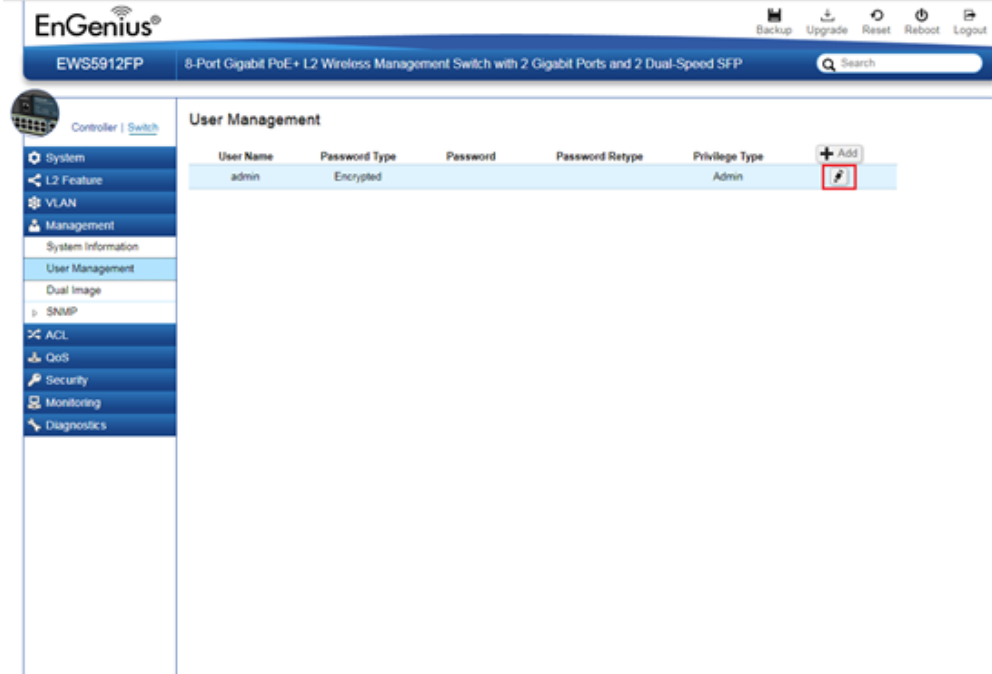


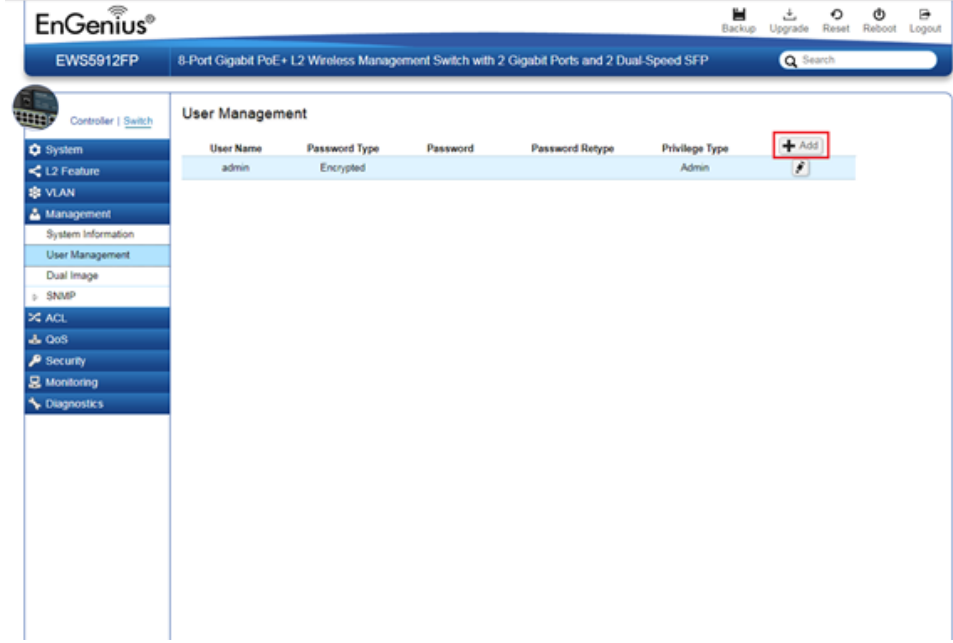
The screenshot shows the EnGenius web interface for the EWS5912FP switch. The 'User Management' section is active, displaying a table with the following columns: User Name, Password Type, Password, Password Retype, and Privilege Type. The 'admin' user is listed with an 'Encrypted' password type and 'Admin' privilege. A red box highlights the 'Edit' icon (pencil) next to the 'admin' user.

Not: Parola için aşağıdaki Karakterlere izin verilmez: “ \ % & ? ' +

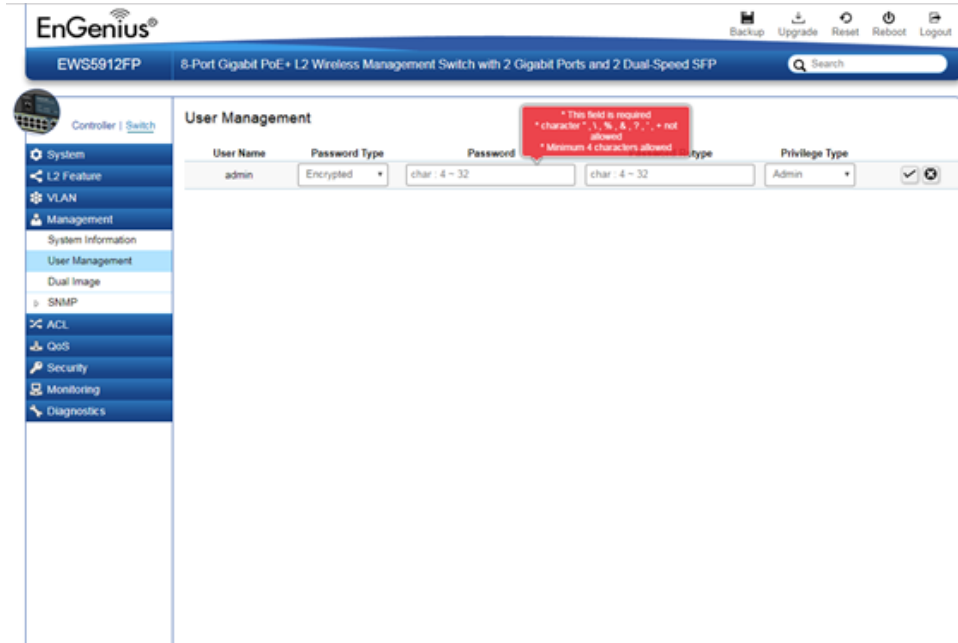


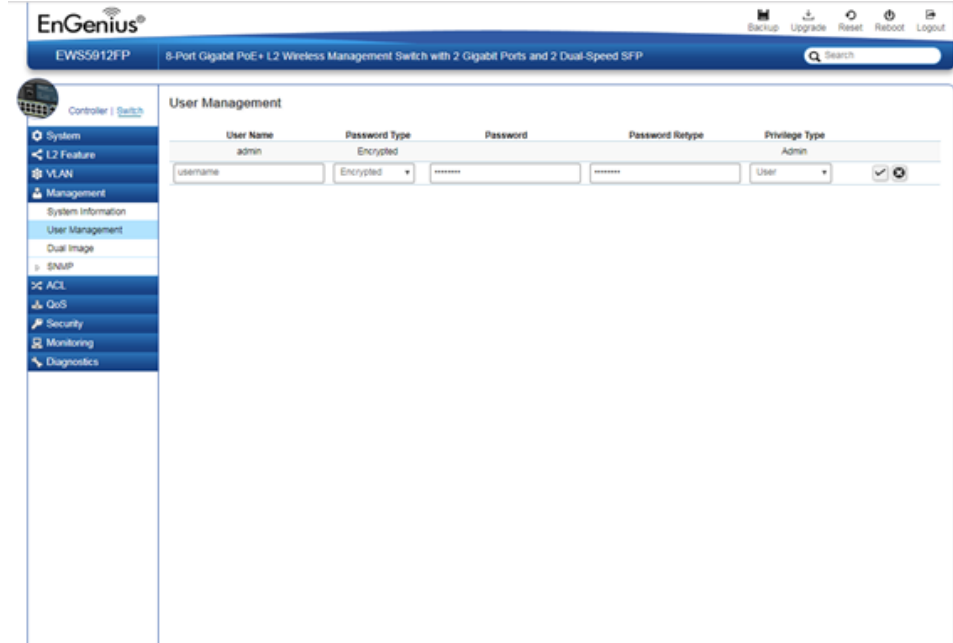
The screenshot shows the EnGenius web interface for the EWS5912FP switch. The 'User Management' section is active, displaying a table with the following columns: User Name, Password Type, Password, Password Retype, and Privilege Type. The 'admin' user is listed with an 'Encrypted' password type and 'Admin' privilege. A red error message is displayed above the 'Password' and 'Password Retype' fields, stating: 'This field is required', 'character \, %, &, ?, + not allowed', and 'Minimum 4 characters allowed'.

4. Oturum açan bir kullanıcı eklemek için Ekle  düğmesine tıklayın, kullanıcı adı ve parola bilgilerini girin ve belirli bir ayrıcalık ayarlayın (örn. Admin, User)




The screenshot shows the EnGenius web interface for a switch. The top navigation bar includes 'Backup', 'Upgrade', 'Reset', 'Reboot', and 'Logout'. The main content area is titled 'User Management' and contains a table with the following columns: 'User Name', 'Password Type', 'Password', 'Password Retype', and 'Privilege Type'. A red box highlights the '+ Add' button in the top right corner of the table.

| User Name | Password Type | Password | Password Retype | Privilege Type | |
|-----------|---------------|----------|-----------------|----------------|---|
| admin | Encrypted | | | Admin |  |



The screenshot shows the EnGenius web interface for a switch. The top navigation bar includes 'Backup', 'Upgrade', 'Reset', 'Reboot', and 'Logout'. The main content area is titled 'User Management' and contains a form for adding a new user. The form fields are: 'User Name' (username), 'Password Type' (Encrypted), 'Password' (*****), 'Password Retype' (*****), and 'Privilege Type' (User). A checkmark and a refresh icon are visible next to the 'Privilege Type' dropdown.

| User Name | Password Type | Password | Password Retype | Privilege Type | |
|---------------------------------------|--|------------------------------------|------------------------------------|-----------------------------------|---|
| admin | Encrypted | | | Admin | |
| <input type="text" value="username"/> | <input type="text" value="Encrypted"/> | <input type="text" value="*****"/> | <input type="text" value="*****"/> | <input type="text" value="User"/> | <input checked="" type="checkbox"/>  |

Not: "User" Ayrıcalığı sadece switch ve controller ayarını görebilir fakat herhangi bir değişiklik yapamaz.

