



## ezMaster Yazılımı Nasıl Güncellenir

Bu makale size ezMaster yazılımını nasıl güncelleyeceğinizi gösterecektir.

- En son ezMaster yazılım sürümünü (.bin) indirin ve ana bilgisayara kaydedin.
- Lütfen ezMaster'ın bir ana bilgisayarda kurulu ve etkin/çalışır durumda olduğundan emin olun.
- Web tarayıcınızı açın (yani İnternet explorer, Google Chrome, Mozilla Firefox)
- ezMaster'ın IP adresini web tarayıcınızın adres çubuğuna yazın. ezMaster yazılımını yükledikten sonra oluşturduğunuz oturum açma bilgilerini yazın.

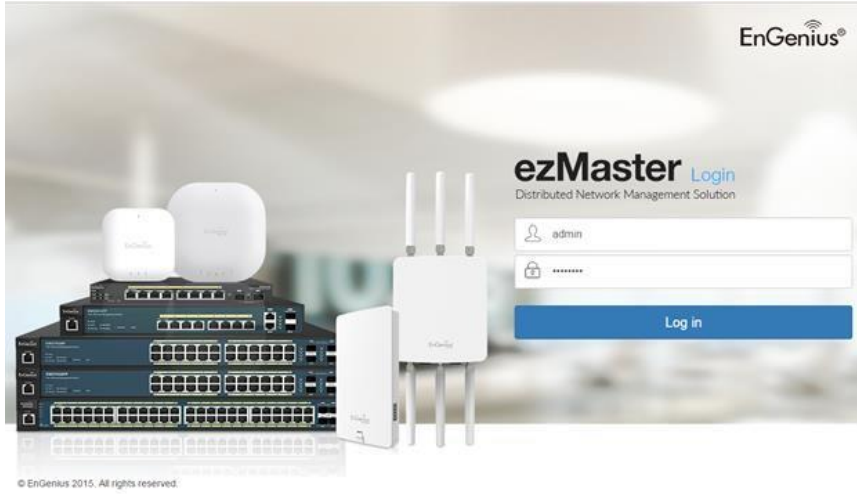

- “Ana Sayfa” sayfası size ezMaster versiyonunu gösterecektir.

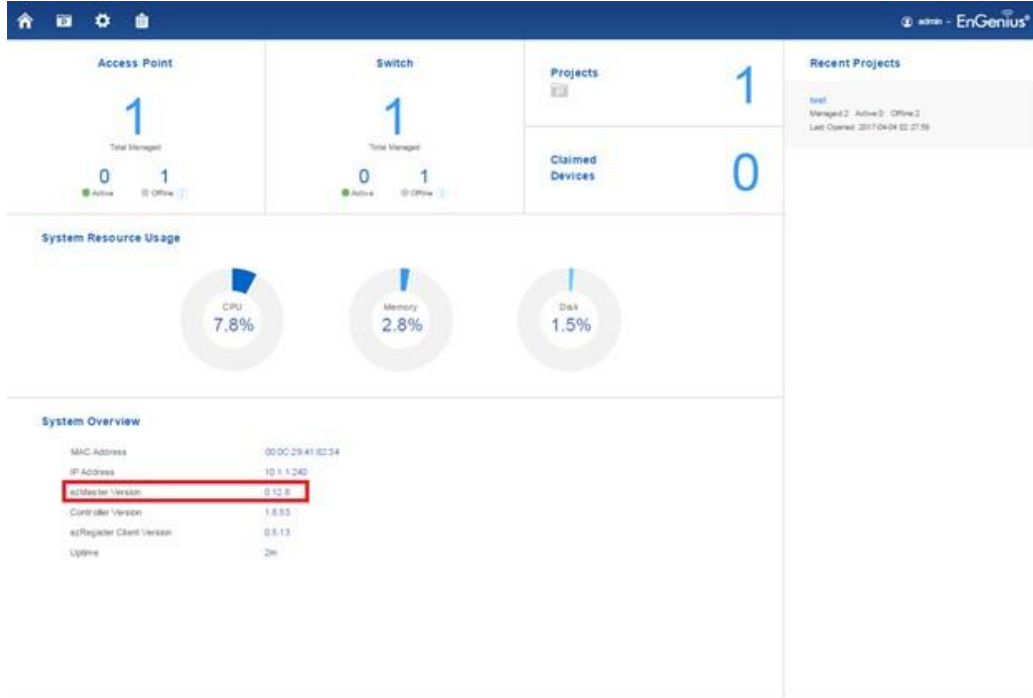

- Dişli çark simgesini “Global Settings”e tıklayın (GUI'nin sol üst kısmında bulunur.)

The screenshot shows the EnGenius GUI dashboard. At the top, there is a navigation bar with a home icon, a settings gear icon (highlighted with a red box), and a user profile icon. The main content area is divided into several sections:

- Global Settings:** A row of three cards: 'Access Point' (1 Total Manager, 0 Active, 1 Offline), 'Switch' (1 Total Manager, 0 Active, 1 Offline), and 'Projects' (1 Total Manager, 0 Claimed Devices).
- System Resource Usage:** Three circular gauges showing CPU usage at 7.8%, Memory usage at 2.8%, and Disk usage at 1.5%.
- System Overview:** A table listing system information:

MAC Address	00:0C:29:41:82:34
IP Address	10.1.1.240
ezMaster Version	0.12.0
Controller Version	1.8.53
ezRegistrar Client Version	0.5.13
Uptime	3m
- Recent Projects:** A table showing project details:

Host	Managed:2	Active:0	Offline:2
Last Cleared	2013-04-04 02:27:58		


- Yazılım Yükseltmesi altında ezMaster'ı Güncelle'yi tıklayın.

The screenshot shows the 'Admin Account' configuration page in the EnGenius GUI. The left sidebar has a menu with 'Update ezMaster' highlighted in red. The main content area contains the following fields:



- Password:** Leave Blank if You Want
- Verify Password:** Leave Blank if You Want
- Full Name:**
- Country:** Please select a country
- Email Address:** f@zoo777@gmail.com
- Company Name:**
- Phone Number:**
- Server Name:** N/A
- Description:** default admin user

At the bottom, there is a blue 'Apply' button and a note: "Note: A valid email address is required to manage your devices in the event of ezMaster server failure."


- Ana bilgisayara kaydedilen .bin dosyasını bulmak için “Dosya Seç”e tıklayın.

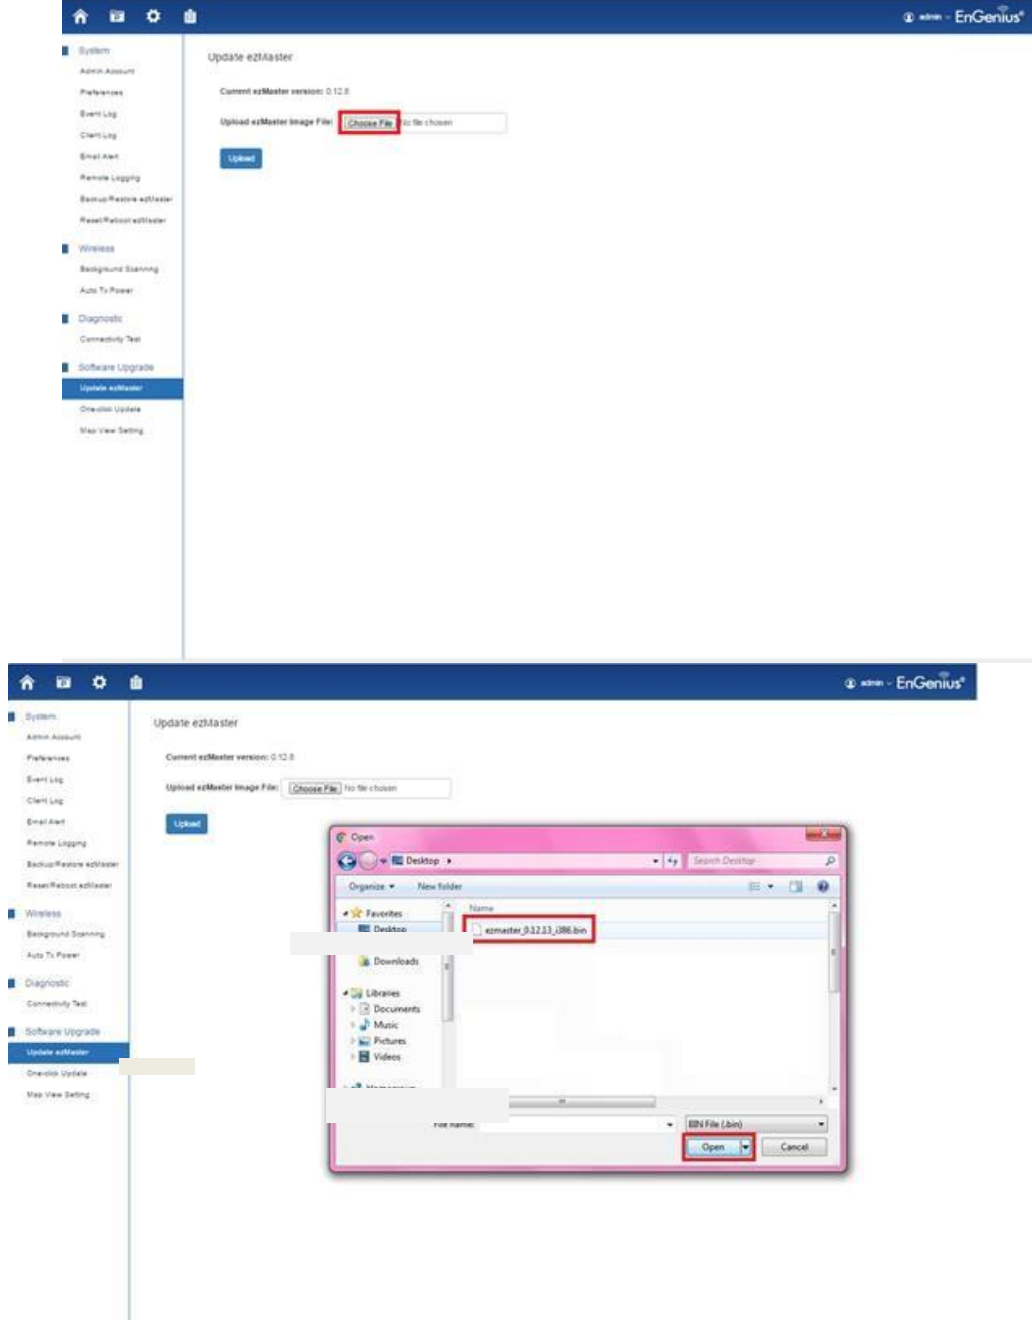

- Donanım yazılımı yükseltmesine devam etmek için “Yükle”ye tıklayın

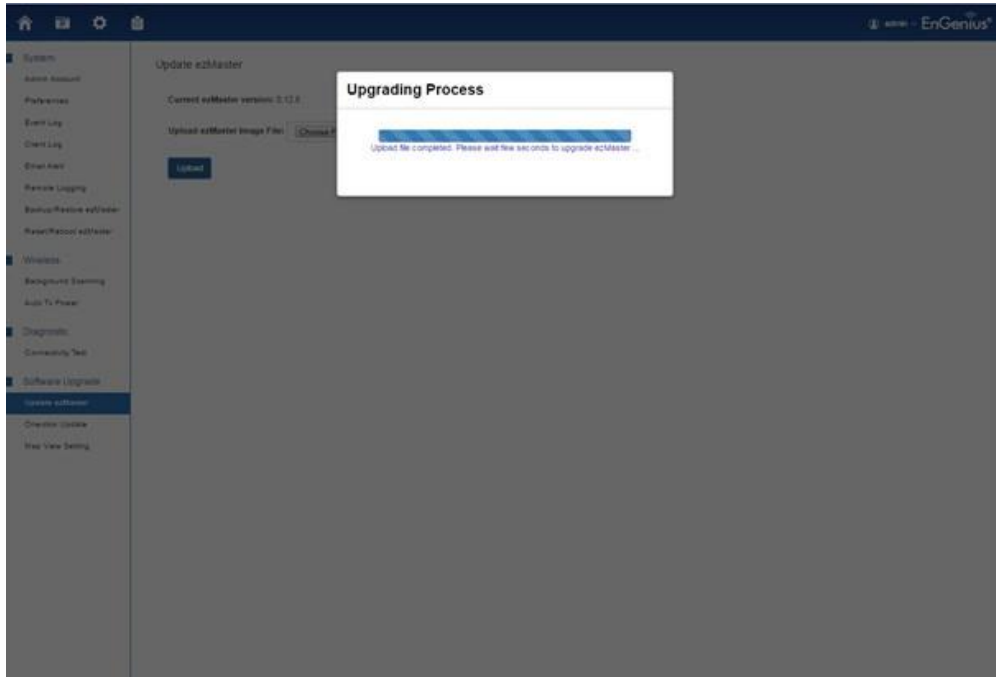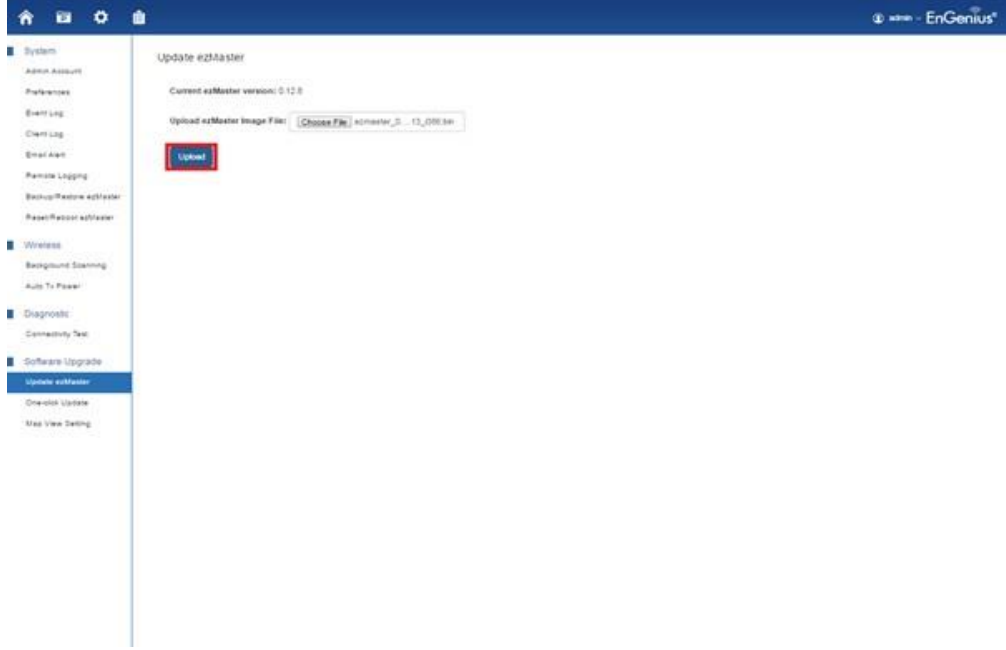

- Firmware güncellemesi tamamlandığında Tamam'a tıklayın.

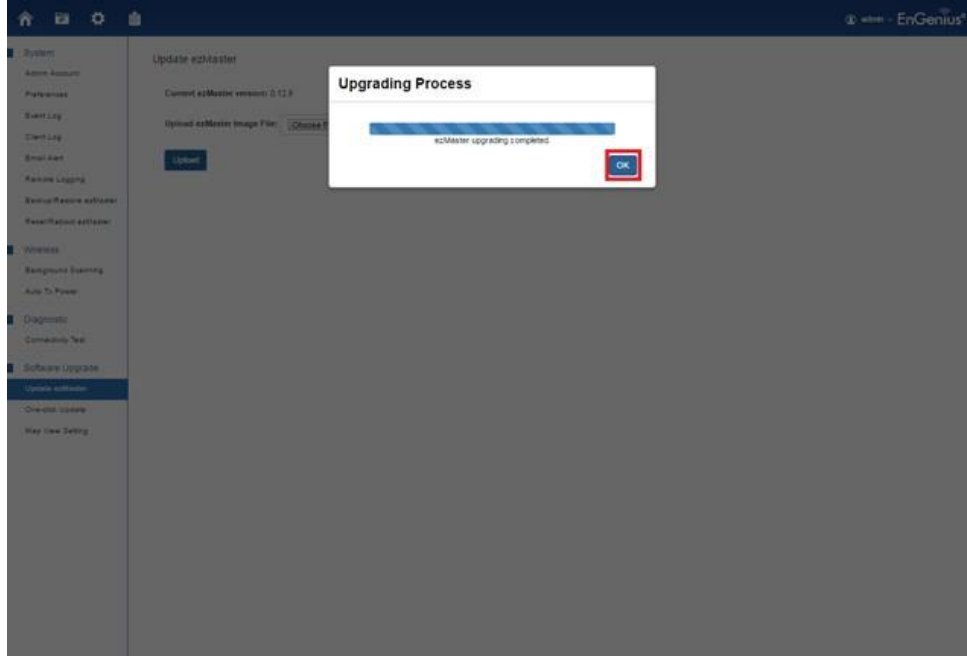

- “Ana Sayfa” sayfası görünecektir. Yazılım güncellemesinin başarılı olup olmadığını doğrulamak için ezMaster sürümünü kontrol edin.

