

VIGORACS LİSANS ANAHTARINI AKTİFLEŞTİRME


Kurulumdan sonra, cihazı MyVigor hesabınıza kaydetmeniz ve VigorACS 2 servisini kullanmak için bir lisans anahtarını etkinleştirmeniz gerekir. Lisans yerel distribütörünüzden satın alınabilir ve her sunucu için 1 aylık ücretsiz deneme lisansı sağlıyoruz. 1. VigorACS 2'yi başlatmak için bir tarayıcı açın ve PC'nin IP adresini veya domain adını URL adresi belirtilen port numarasıyla birlikte yazın, sonra giriş sayfasını göreceksiniz. VigorACS 2 yüklü olan bilgisayarı kullanıyorsanız, port numarası ile "localhost" yazmanız yeterlidir. Giriş sayfasında, giriş yapmak için varsayılan kullanıcı adı "root" ve parola "admin123" ü kullanın.

```
[root@localhost bin]# ./vigoracs.sh


Mysql process id : 3172 3260
Influxdb process id : 13842
Vigoracs process id :

1. start mysql/mariadb
2. shutdown mysql/mariadb
3. start influxdb (must be root to run influxdb)
4. shutdown influxdb (must be root to run influxdb)
5. start VigorACS
6. shutdown VigorACS
7. edit bind IP of VigorACS Server(please keyin IP or servername)
8. set the MAX. and MIN. memory value of running java (It will be valid after re
starting VigorACS )
9. view the MAX. and MIN. memory value of running java
10. exit
input select num :
5
Which ip address do you want to bind for VigorACS service ( x.x.x.x or Enter for
bind 0.0.0.0 address)?
0.0.0.0
Which http port do you want to bind for VigorACS service ( port number or Enter
for 80 port)?
8080
Which https port do you want to bind for VigorACS service ( port number or Enter
for 443 port)?
8443
Which stun port do you want to bind for VigorACS service ( port number or Enter
for 3478 port)?
3478
Which syslog port do you want to bind for VigorACS service ( port number or Ente
r for 514 port)?
5144
How many memory do you want to set for VigorACS service? (Enter for default MAX
Memory is 1024, MIN Memory is 900 MB)
MAX Memory What you want? (Unit: MB)
1024
MIN Memory What you want? (Unit: MB)
900
Starting vigoracs:
[OK]
```


- Geçerli bir lisans bulunmadığına dair bir uyarı verecektir, **Activate'i** tıklayın , bu sizi MyVigor portalına yönlendirecektir.

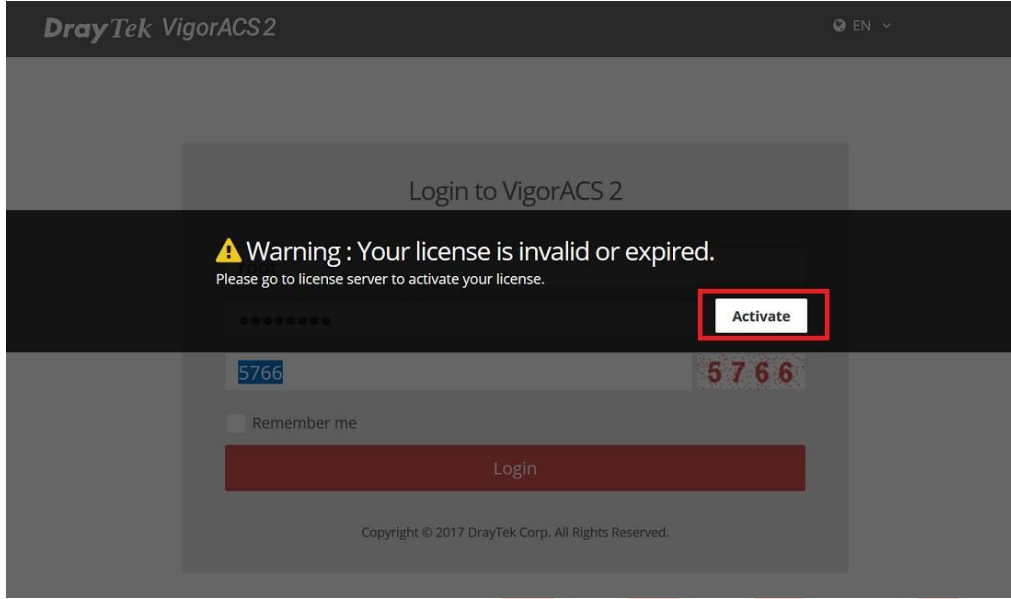

1. MyVigor hesabınızla giriş yapın.

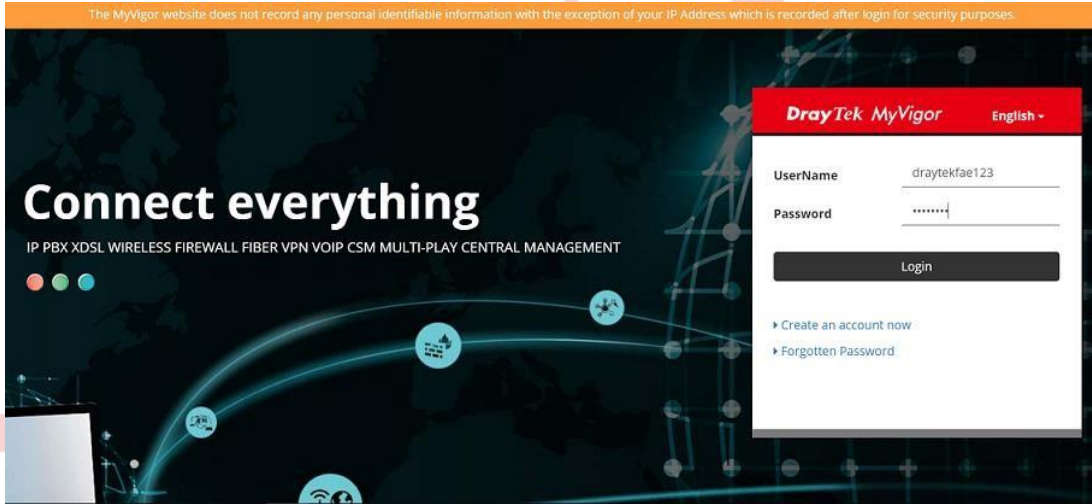

2. VigorACS 2 sunucu için takma ad yazın, ardından sunucuyu MyVigor hesabınıza kaydetmek için Add'e tıklayın.

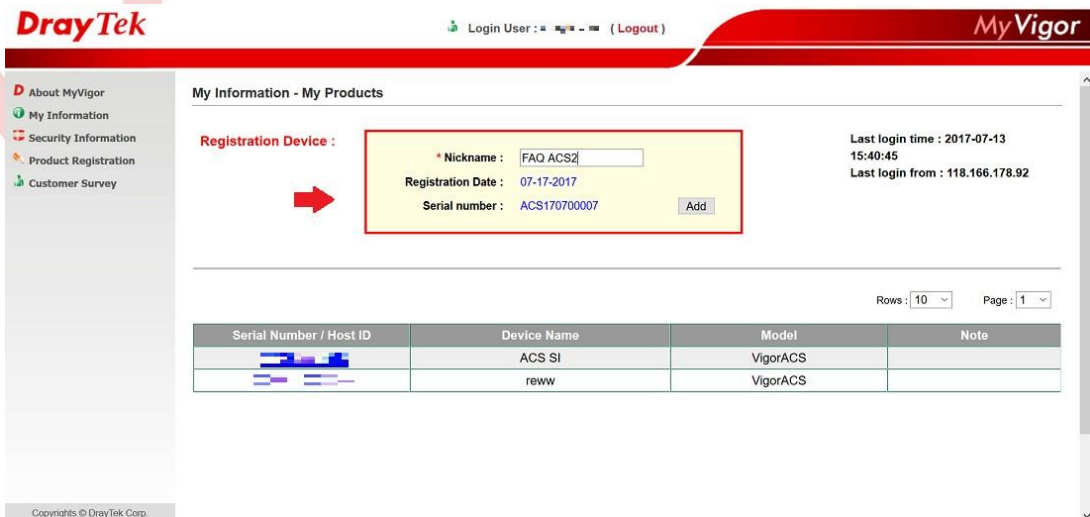

3. Deneme sürümünü aktifleştirmek için **Trial**'e tıklayın. Her sunucu için 1 aylık deneme lisansı veriyoruz, deneme sürümünden sonra yıllık lisansı yerel distribütörünüzden satın almanız gerekecek.

DrayTek MyVigor

Login User : (Logout)

My Information - My Products

Device Information

Device Name : FAQ ACS2
Host ID : ACS17070007
Model : VigorACS2 Series

Rename ACS License Help Transfer Back

Device's Service Expired License

Service	Provider	Action	Status	Start Date	Expired Date	Nodes	Note
ACS	DT-ACS-2	Trial	On	-	-	-	-

After the trial period, contact your local DrayTek dealer/distributor for purchasing the formal edition of WCF service.

Type (blacklist/whitelist)	Cyren (Commtouch)	BPJM	fragFINN
Blacklist (customer can choose category to block/pass.)	Blacklist (some predefined website will be blocked. Others will be passed.)	Whitelist (only some predefined website pass, others will be blocked.)	
Region	Global	All German speaking countries	All German speaking countries

Copyrights © DrayTek Corp.

4. Sözleşmeyi okuyun ve kutuyu işaretleyin, ardından **Next** butonuna tıklayın.

DrayTek MyVigor

Login User : (Logout)

User Name :
Serial Number : acs17070007
Model : VigorACS2

1. Grant of License for Personal Use
DrayTek grants you a non-exclusive, non-transferable license to use the program with which this license is distributed (the "Software"), including any documentation files accompanying the Software ("Documentation"), for internal business use only, for up to the number of users specified in sales order and invoice. You have the right to make one backup copy of the Software and Documentation solely for archival, back-up or disaster recovery purposes. You shall not exceed the scope of the license granted hereunder. Any rights not expressly granted by DrayTek to you are reserved by DrayTek, and all implied licenses are disclaimed.

2. Ownership
You have no ownership rights in the Software. Rather, you have a license to use the Software as long as this License Agreement remains in full force and effect. Ownership of the Software, Documentation and all intellectual property rights therein shall remain at all times with DrayTek and its licensors. Any other use of the Software by any other entity is strictly forbidden and is a violation of this License Agreement.

3. Proprietary Notices
Customer agrees to maintain and reproduce all copyright and other proprietary notices on all copies, in any form, of the software in the same form and manner that such copyright and other proprietary notices are included on the Software. Except as expressly authorized in this Agreement, Customer shall not make any copies or duplicates of any software without the prior written permission of DrayTek.

4. Restrictions
The Software is licensed as a single product, it may not be used on more than one Device.
a. You shall not decompile, reverse engineer, disassemble or otherwise reduce any party of this Software to human readable form nor permit any third party to do so. The interface information necessary to achieve interoperability of the Software with independently created computer programs will be provided by DrayTek on request.

I have read and accept the above Agreement. (Please check this box).

Next

Copyrights © DrayTek Corp.

5. Deneme lisansının başlangıç tarihini seçin, ardından **Register**'a tıklayın.

DrayTek MyVigor

Login User : (Logout)

Apply For A License Number

Service Name : ACS

STEP 2


Activation Date (MM-DD-YYYY) : 07-17-2017 (>= 07-17-2017)

Cancel

Register

Copyrights © DrayTek Corp.

6. Lisansın başarılı bir şekilde etkinleştirildiği anlamına gelen lisans bilgisini görmelisiniz. VigorACS 2 web'e geri dönmek için "Login to ACS" düğmesine basın.

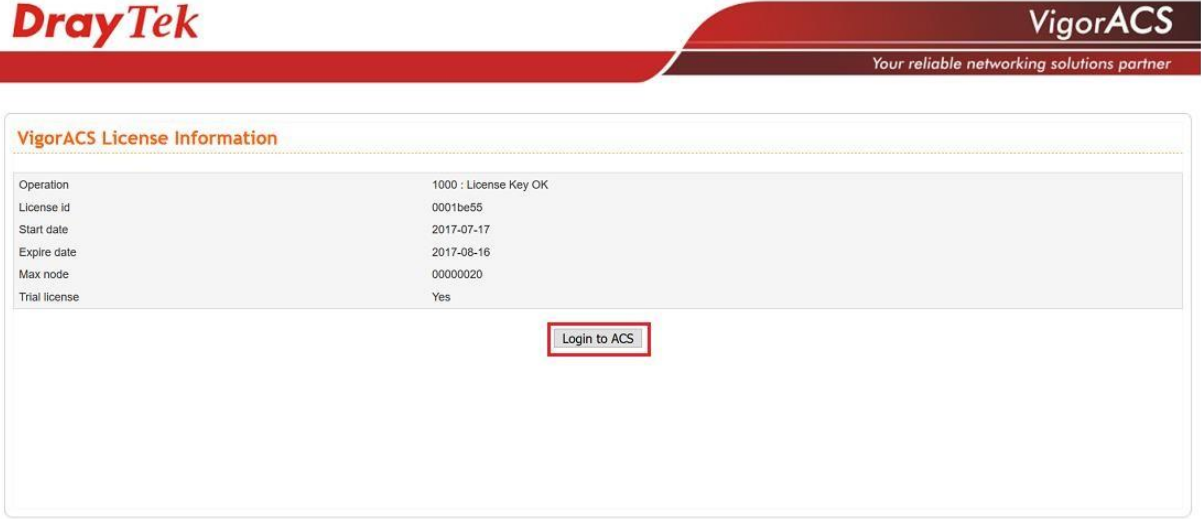


DrayTek **VigorACS**
Your reliable networking solutions partner

VigorACS License Information

Operation	1000 : License Key OK
License id	0001be56
Start date	2017-07-17
Expire date	2017-08-16
Max node	00000020
Trial license	Yes

[Login to ACS](#)

7. Sonunda VigorACS 2'nin tadını çıkarabiliriz!

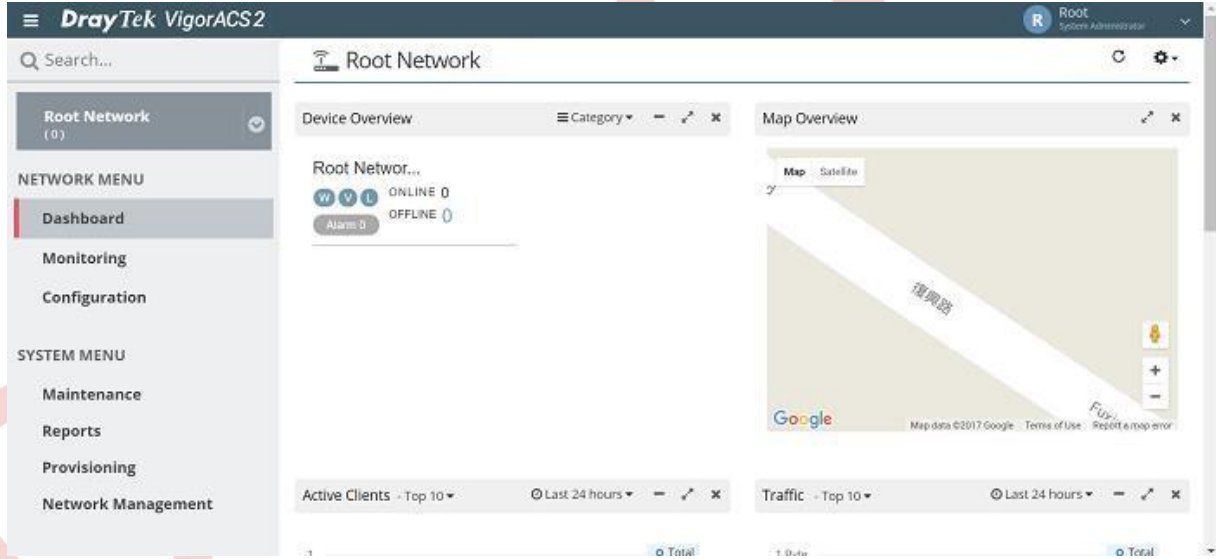

DrayTek VigorACS2 Root Network

Search...

Root Network (0)

NETWORK MENU

- Dashboard
- Monitoring
- Configuration

SYSTEM MENU

- Maintenance
- Reports
- Provisioning
- Network Management

Device Overview

Root Networ...
ONLINE 0
OFFLINE 0
Alarm 0

Map Overview

Active Clients - Top 10 - Last 24 hours

Traffic - Top 10 - Last 24 hours